


AN 10x50M22

TACTICAL BINOCULAR

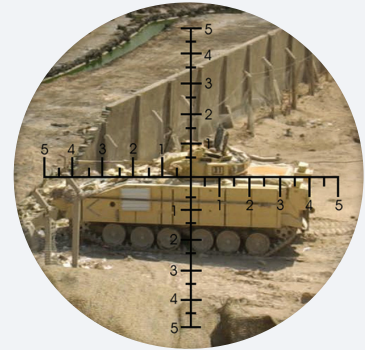

Display

The AN 10x50M22 incorporates BAK-4 Porro prisms and multi-coated lenses, delivering impressive light transmission and resolution for brilliantly clear vision. Non-slip UV-resistant rubber armoring makes this unit comfortable to operate even in cold weather.

The AN 10x50M22 incorporates M22 reticles and is built to meet the needs of the most demanding professional operators. It is waterproof and shockproof and adheres to the latest military standards while remaining light and compact.

Optics	AN 10x50M22
Magnification (x)	10
Objective lens diameter (mm)	50
Focus range (m)	6 - ∞
Exit pupil (mm)	5
Eye relief (mm)	19
Field of view (°)	7
Field of view @ 1,000y (feet)	367
Diopter adjustment range	±5
Twilight factor	22
Relative brightness	25
Transmission (%)	95
Lens coating	FMC
Reticle type	M22
Mechanics, Electronics & Environmental	
Interpupillary distance (mm)	56-74
Weight	1,480
Dimensions	195x180x70
Tripod mountable	✓
Operating temperature range (°C)	-50 to +70
Storage temperature range (°C)	-55 to +75
Humidity (%)	98
Nitrogen purged	✓
Waterproofing	MIL-STD-810G

AN 10x50M22 TACTICAL BINOCULAR

AN 10x50M22

TACTICAL BINOCULAR



DELIVERY SET

Supplied with the following standard accessories:

- Soft case
- Neck strap
- Lens cover
- Lens cleaning cloth
- Operation manual

OPTIONAL ACCESSORIES



ATA - Tripod Adapter



Hard Case

